


JBC-902

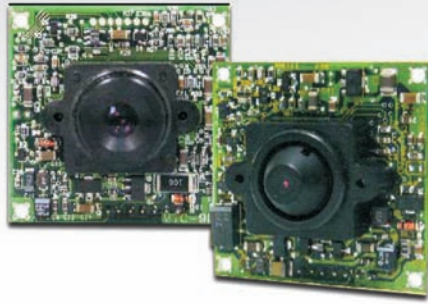

JBC-906 / JBC-906H

## JBC-902

1/3" B/W Board Camera

## JBC-906

1/3" B/W Board Camera

## JBC-906H

1/3" Hi-Res. B/W Board Camera

### Specification

Model	JBC-902	JBC-906	JBC-906H
Pick Up Element	1/3" LG CCD	1/3" SONY Super HAD CCD	1/3" SONY Super HAD CCD
Picture Element	EIA: 512(H) x 492(V) CCIR: 512(H) x 582(V)	EIA: 510(H) x 492(V) CCIR: 500(H) x 582(V)	EIA: 768(H) x 494(V) CCIR: 752(H) x 582(V)
Horizontal Frequency	EIA: 15.750 KHz., CCIR: 15.625 KHz.		
Vertical Frequency	EIA: 60 Hz., CCIR: 50 Hz		
Synchronization	Internal		
Scanning System	2 : 1 Interlace		
Resolution	Horizontal 420 TV Lines	Horizontal 420 TV Lines	Horizontal 600 TV Lines
Sensitivity	0.1 Lux @F2.0	0.1 Lux @F2.0	0.2 Lux @F2.0
S/N Ratio	More than 48 dB (AGC Off)		
Gain Control	Automatic Gain Control		
Electronic Shutter	Auto: 1/60(50) sec. ~ 1/100,000 sec.		
Backlight Compensation	Automatic BLC		
Video Output	1.0 Vp-p Composite Video Output; 75 Ohms		
Lens Built-in	3.6mm/F2.0 Board Lens		
Operating Temperature	- 10 ~ +50 degree C		
Power Consumption	Max. 1.2 W		
Power Supply	DC 12V		
Dimension	32 x 32 x 25mm (with Board Lens) ; 32 x 32 x 11.5mm (with Pinhole Lens)		
Weight	17.5 grams (with Board Lens) ; 15.5 grams (with Pinhole Lens)		
<b>Optional Lens</b>			
CS- Lens Mount	Available (Optional)		
Board Lens	2.5mm/4.3mm/6.0mm/8.0mm/12.0mm (Optional)		
Pinhole Lens	3.7mm/F2.0 or 4.3mm/F2.0 Cone-type Pinhole Lens		

### Dimensions

